

Copyright 2004 by Cisco Systems, Inc. All rights reserved. Cisco Confidential

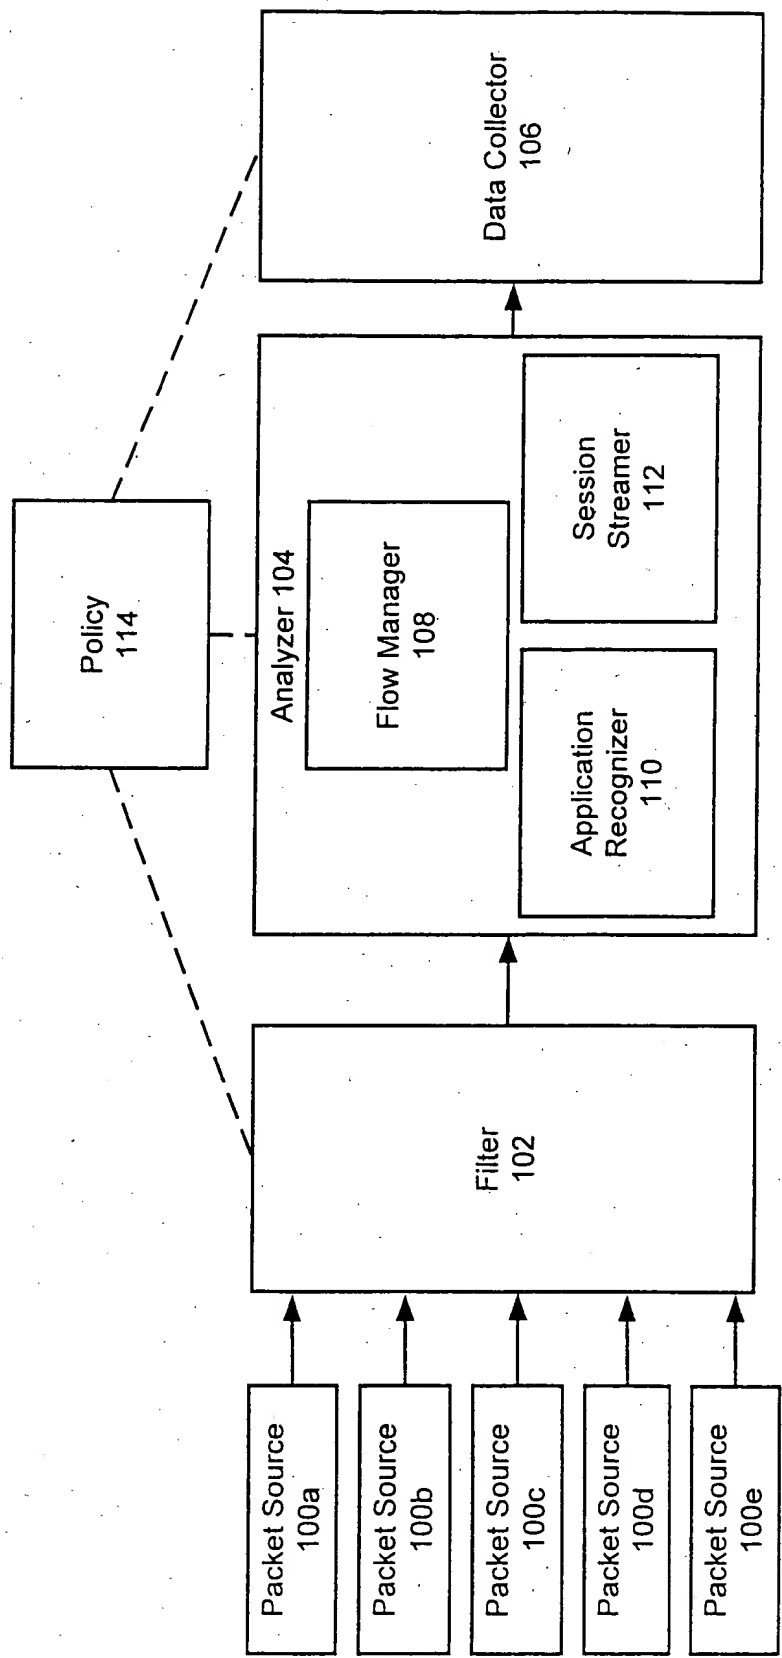


Fig 1

FIG. 2 is a block diagram of a system for application recognition.

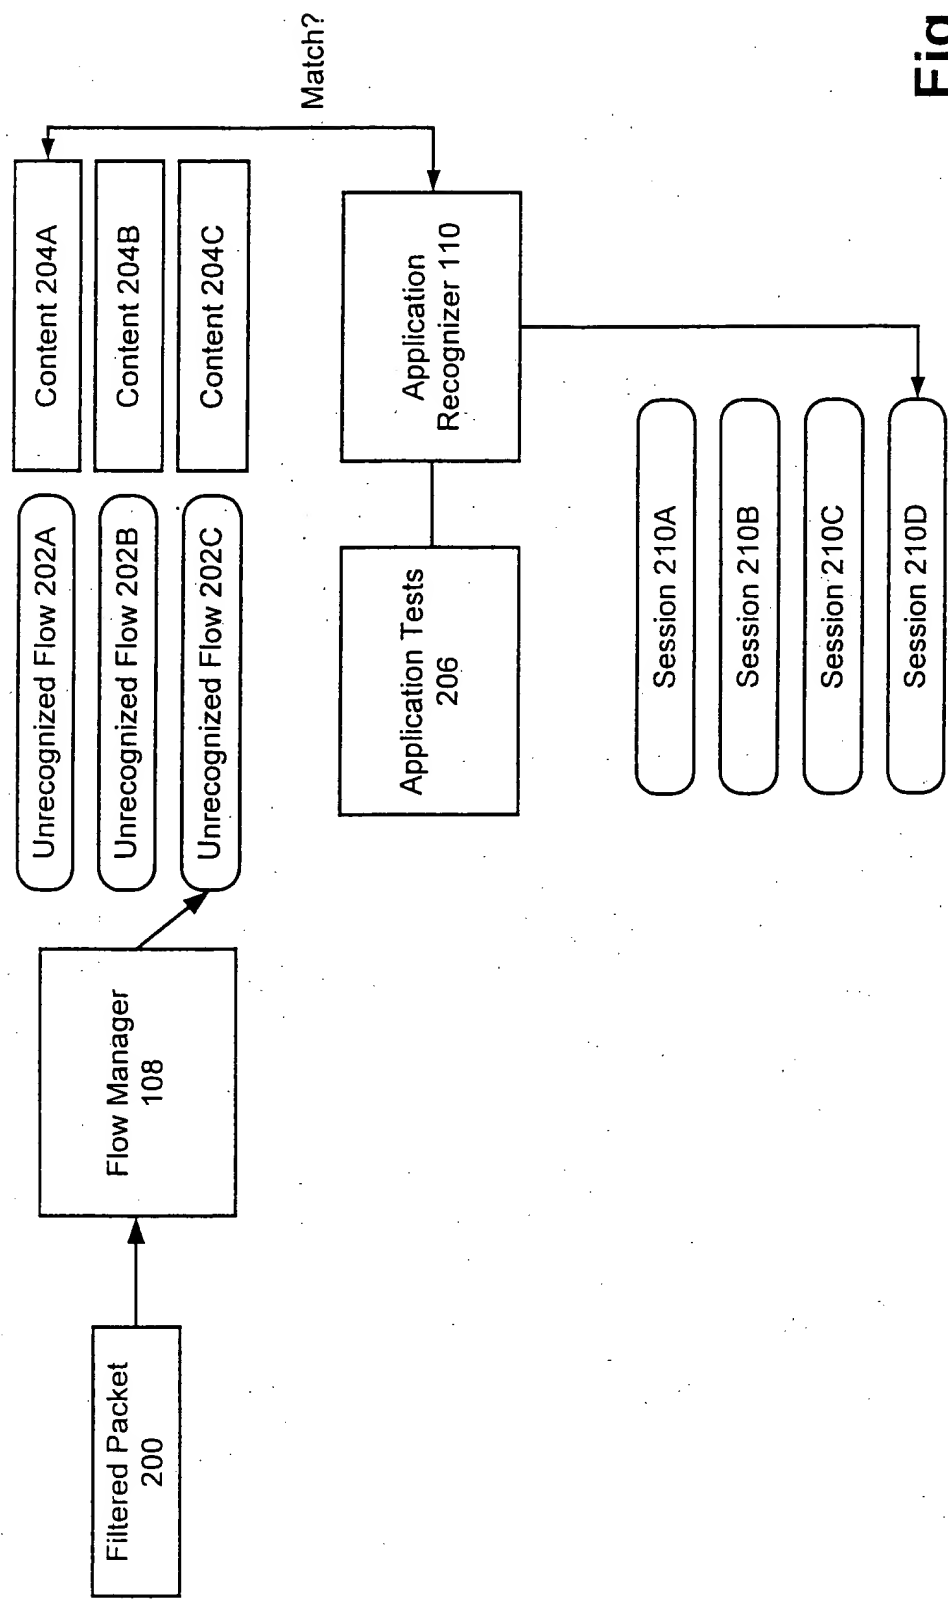


Fig 2

```

graph TD
    FP[Filtered Packet 300] --> FM[Flow Manager 108]
    FM --> RF302A[Recognized Flow 302A]
    FM --> RF302B[Recognized Flow 302B]
    FM --> RF302C[Recognized Flow 302C]
    RF302A --> Match[Match?]
    RF302B --> Match
    RF302C --> Match
    Match --> SS[Session Streamer 112]
    SS --> AS[Application Streamers 306]
    SS --> S210A[Session 210A]
    SS --> S210B[Session 210B]
    SS --> S210C[Session 210C]
    SS --> S210D[Session 210D]
    
```

Fig 3

FIG. 4

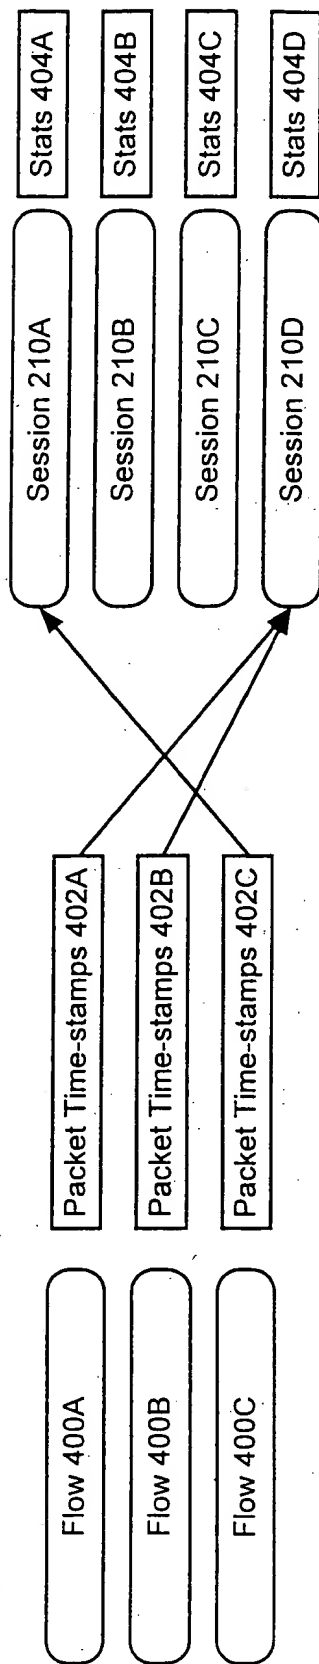


Fig 4

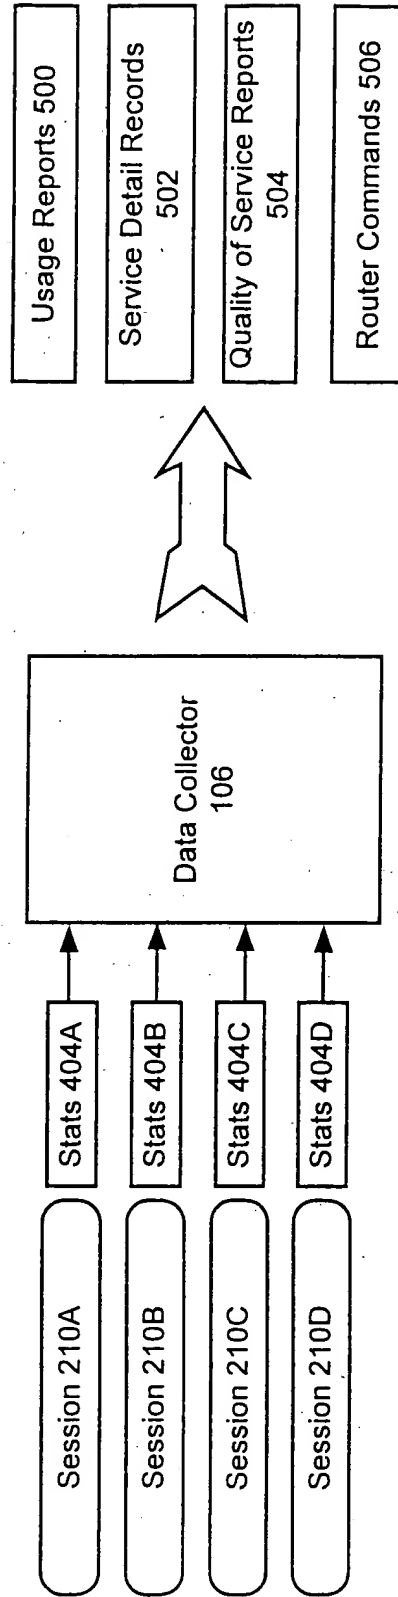


Fig 5

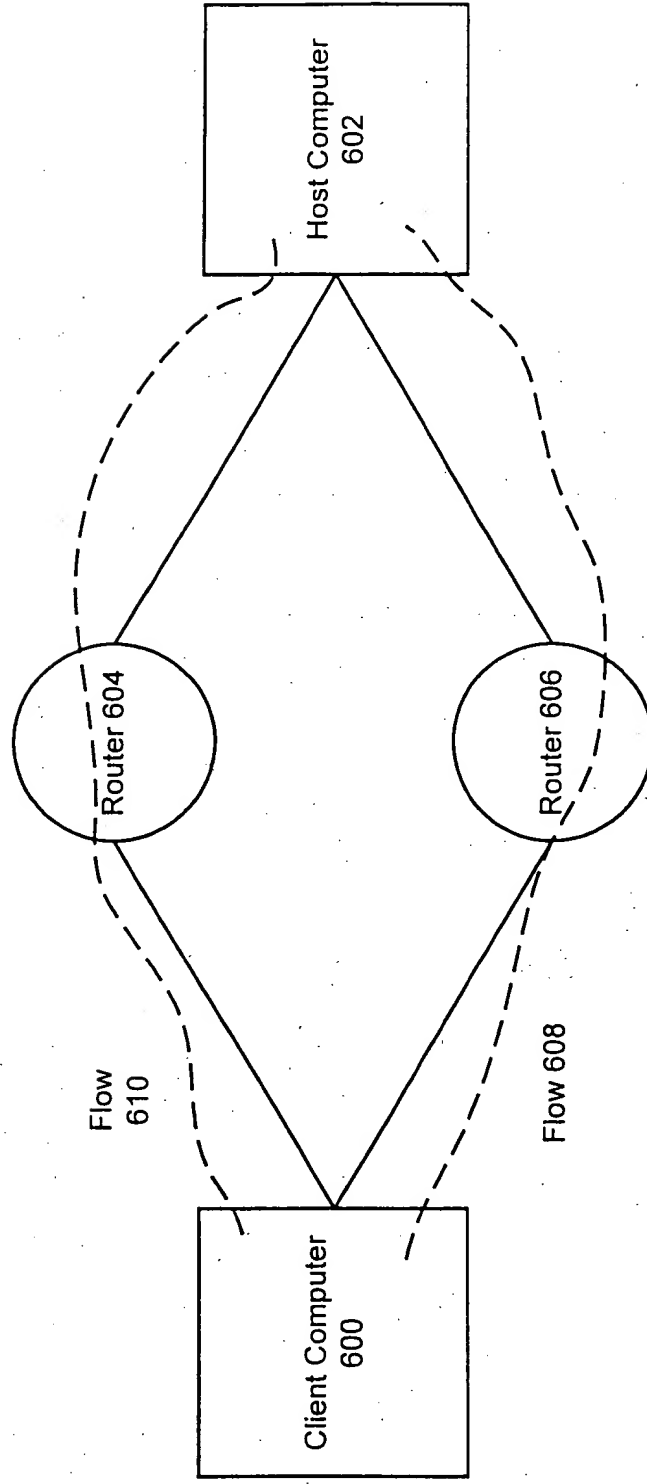


Fig 6

FIG. 7

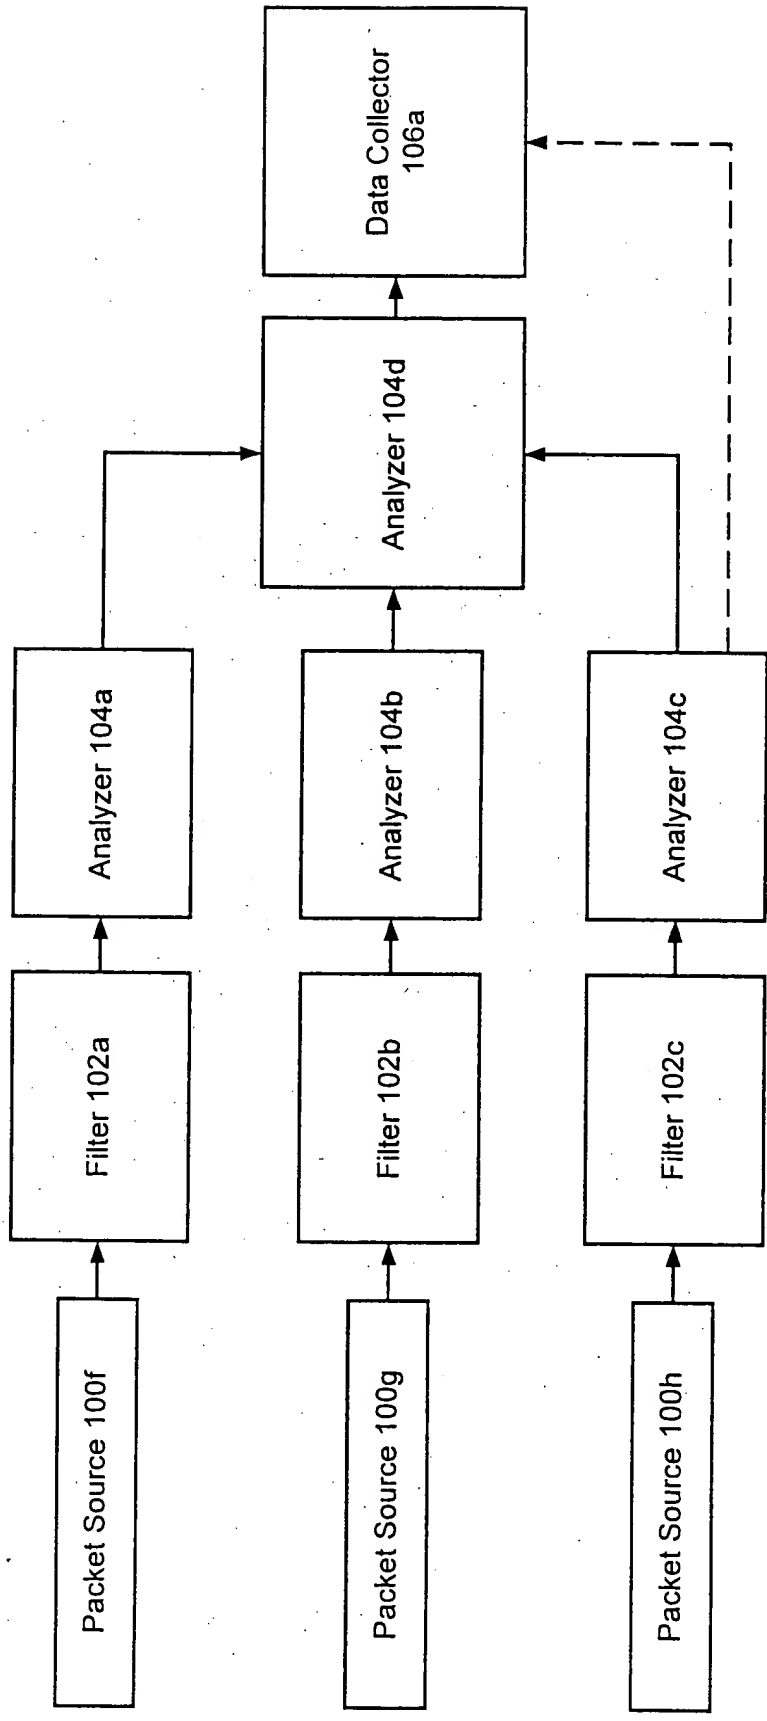


Fig 7